


Semi-automatic net weight filling machines

Top-Fill with Crimper five-gallon pails

- ABA-FILL-TFGESF-S1-IC-1C-X
- For non-hazardous area remove suffix "X" from Model number
- Top-fill gravity feed
- MT Intrinsically safe terminal
- Semi-automatic filling.
- Single fill station
- Indexing pneumatic conveyor
- Safety guarding with door interlocks
- Fail safe spring return ball valves
- 3- 4 Five gallon pails per minute

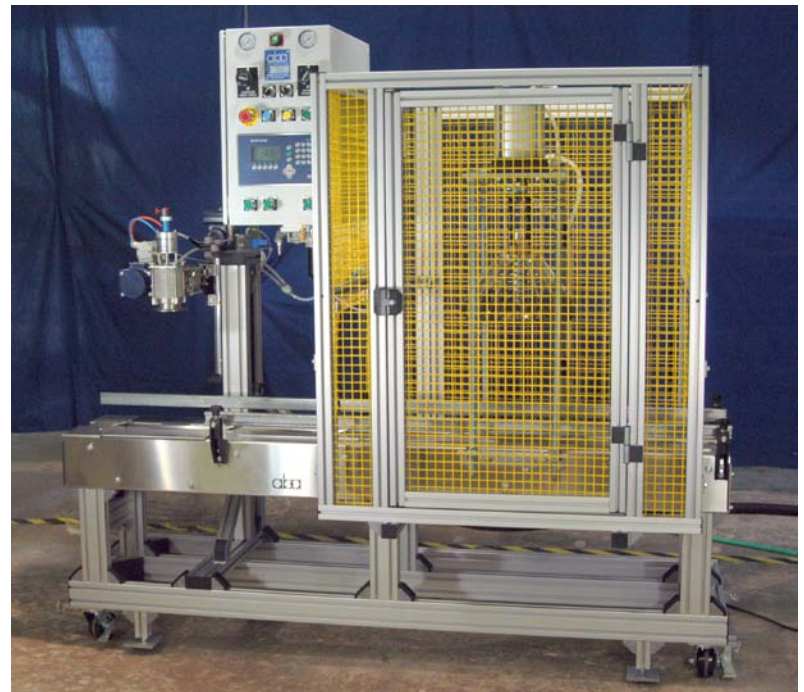

Bottom-Fill with Crimper five-gallon pails

- ABA-FILL-BFGESF-S1-IC-1C-X
- For non-hazardous area remove suffix "X" from Model number
- Bottom-fill gravity feed
- PLC Controls, intrinsically safe
- Semi-automatic filling.
- Single fill station
- Indexing pneumatic conveyor
- Safety guarding with door interlocks
- Fail safe spring return ball valves
- 2- 3 Five gallon pails per minute




8041 Arrowridge Blvd., Suite G, Charlotte, NC 28273 USA
Tel: +1 (704) 714-3494 Fax: +1 (704) 714-3496
sales@abaltd.com www.abaltd.com

Semi-automatic net weight filling machines

Top-Fill ½ pint - gallon

- ABA-FILL-TFGESF-S1-X
- For non-hazardous area remove suffix "X" from Model number
- Top-fill gravity feed
- MT Intrinsically safe terminal
- Semi-automatic filling.
- Single fill station
- Fail safe spring return ball valves
- 5 gallons per minute
- 8 quarts per minute

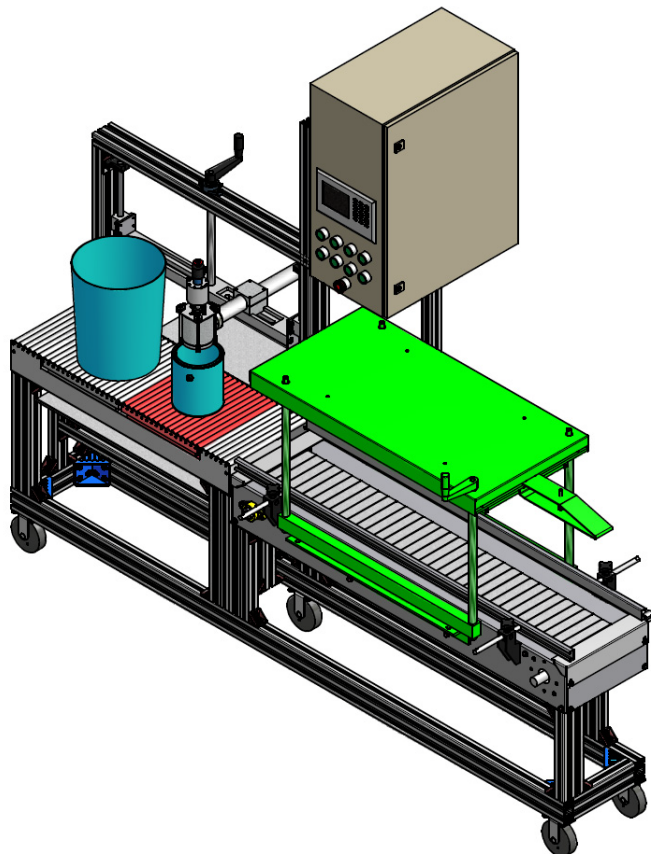

Top-Fill Quart to 5-Gallon with lid press

- ABA-FILL-TFGESF-S1-EC-5LP
- For hazardous area add suffix "X" to Model number
- Top-fill gravity feed
- PLC or MT Intrinsically safe terminal
- Semi-automatic filling.
- Single fill station
- Fail safe spring return ball valves
- Roller press for quarts to 5 Gallon lids