


ABA 99

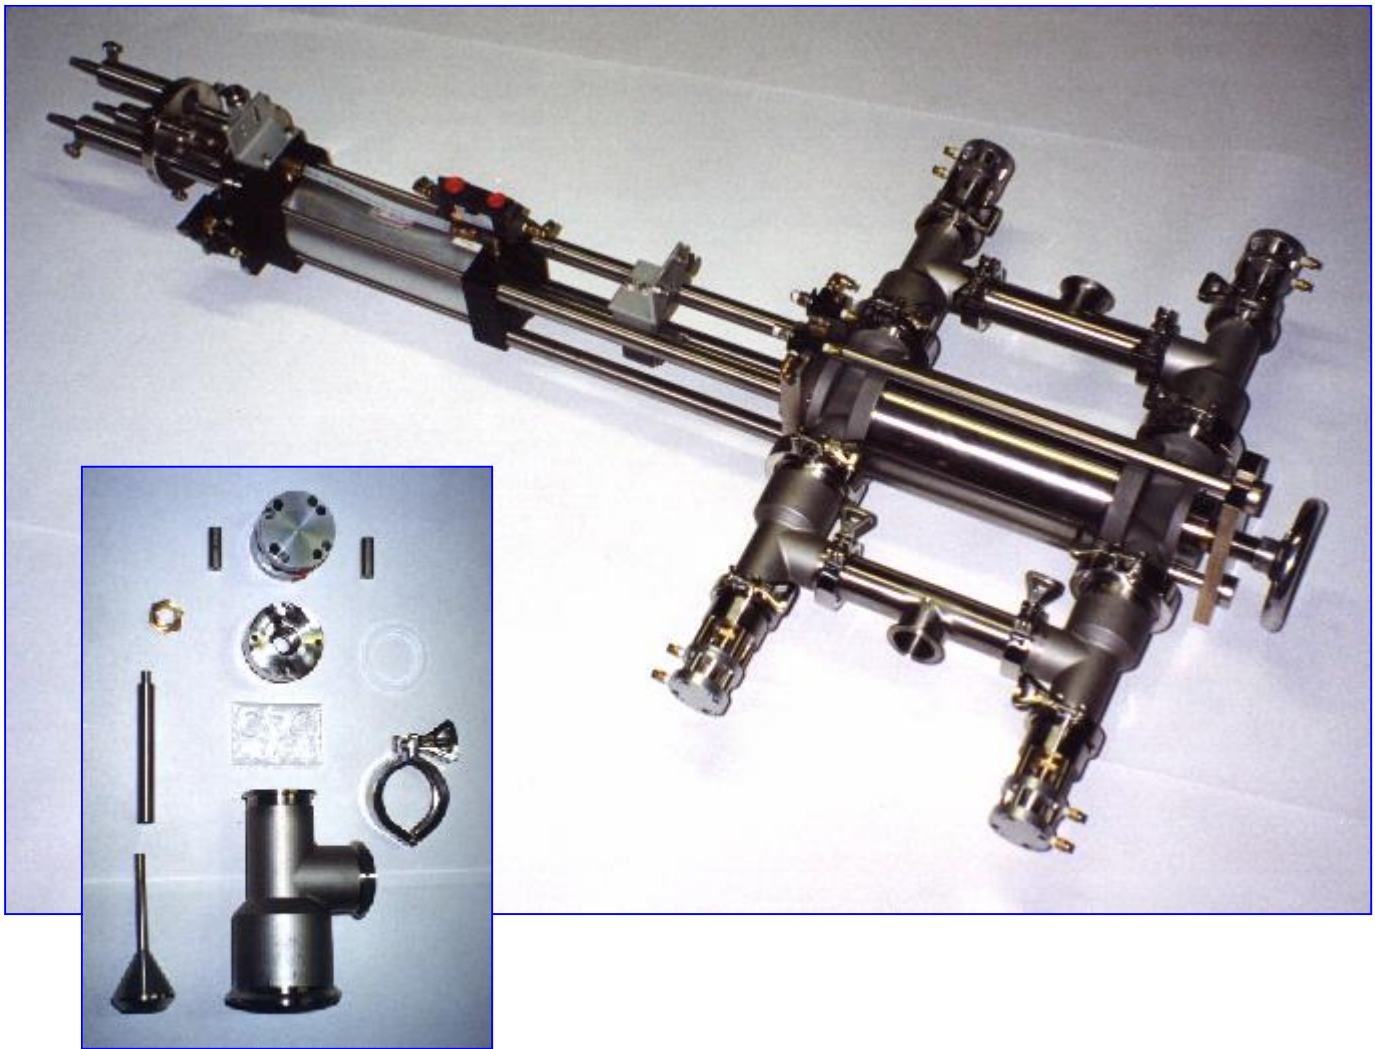

Double acting positive displacement volumetric piston pump with power check valves. Both sides of piston flooded with product, reducing cylinder and seal wear, and increasing the speed of the fill cycle. Pump displacement is from $\frac{1}{2}$ pint to 1 gallon per cycle with accuracy of $\pm 0.25\%$. Complete with 6-position volume selector turret. Allows for direct product feed. Eliminates the need for the filter tub.