


ABA-AF-2S-WTX



Net weight five-gallon pail filler with diving probes for foaming products and tight head pails. Machine as shown, is intrinsically safe for use in a hazardous environment. Fill speed 6 – 8 pails/min

ABA-AF-2S-WTX

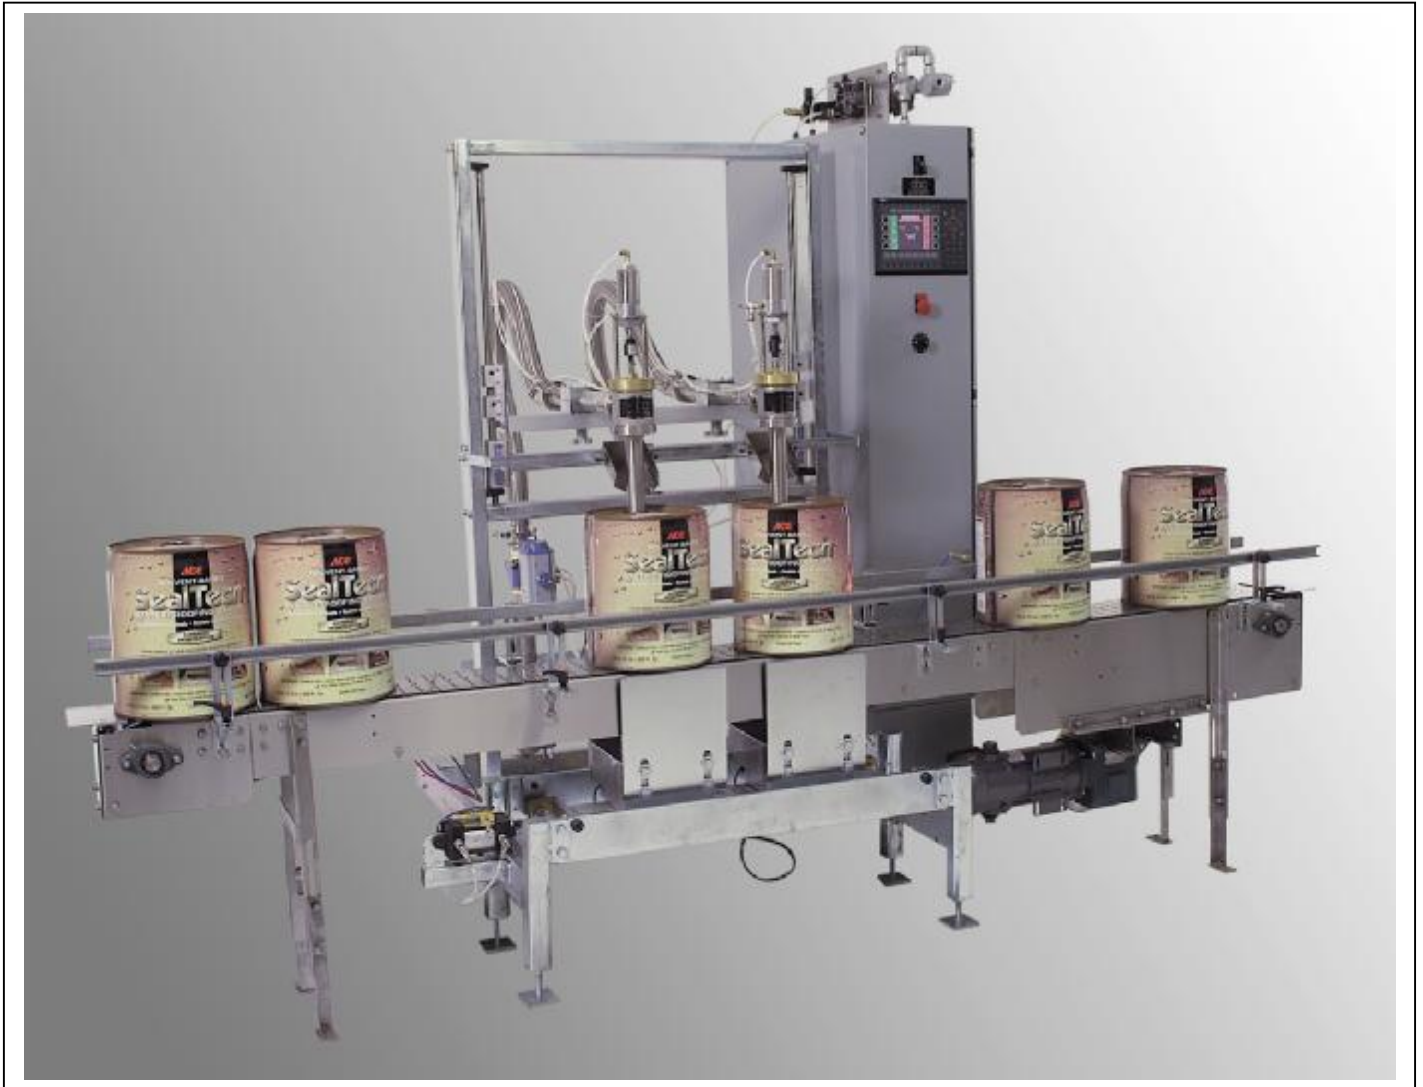

Picture at top shows close up of carriage assembly.
Below shows ease of removal for load cell deck.

