



ABA-AF-2T-2000S

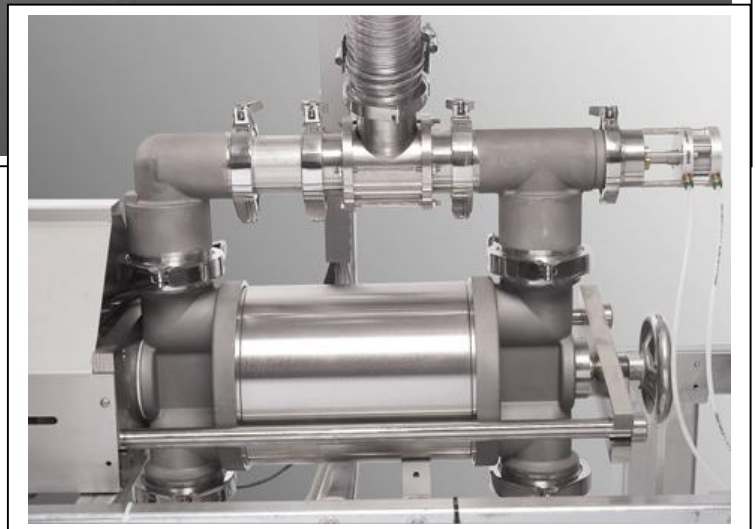

- Twin Head Volumetric Fill with 5 gallon pumps
- 18 - 20 five gallon pails per minute
- Optional powered check valves to simplify product infeed requirements
- P.L.C. or pneumatic controls with operator interface panel
- Accuracy ¼ of 1% by volume
- Fully mobile pump frame for easy maintenance
- Optional lid press/crimp units

Model 2000 with powered check valve pumps

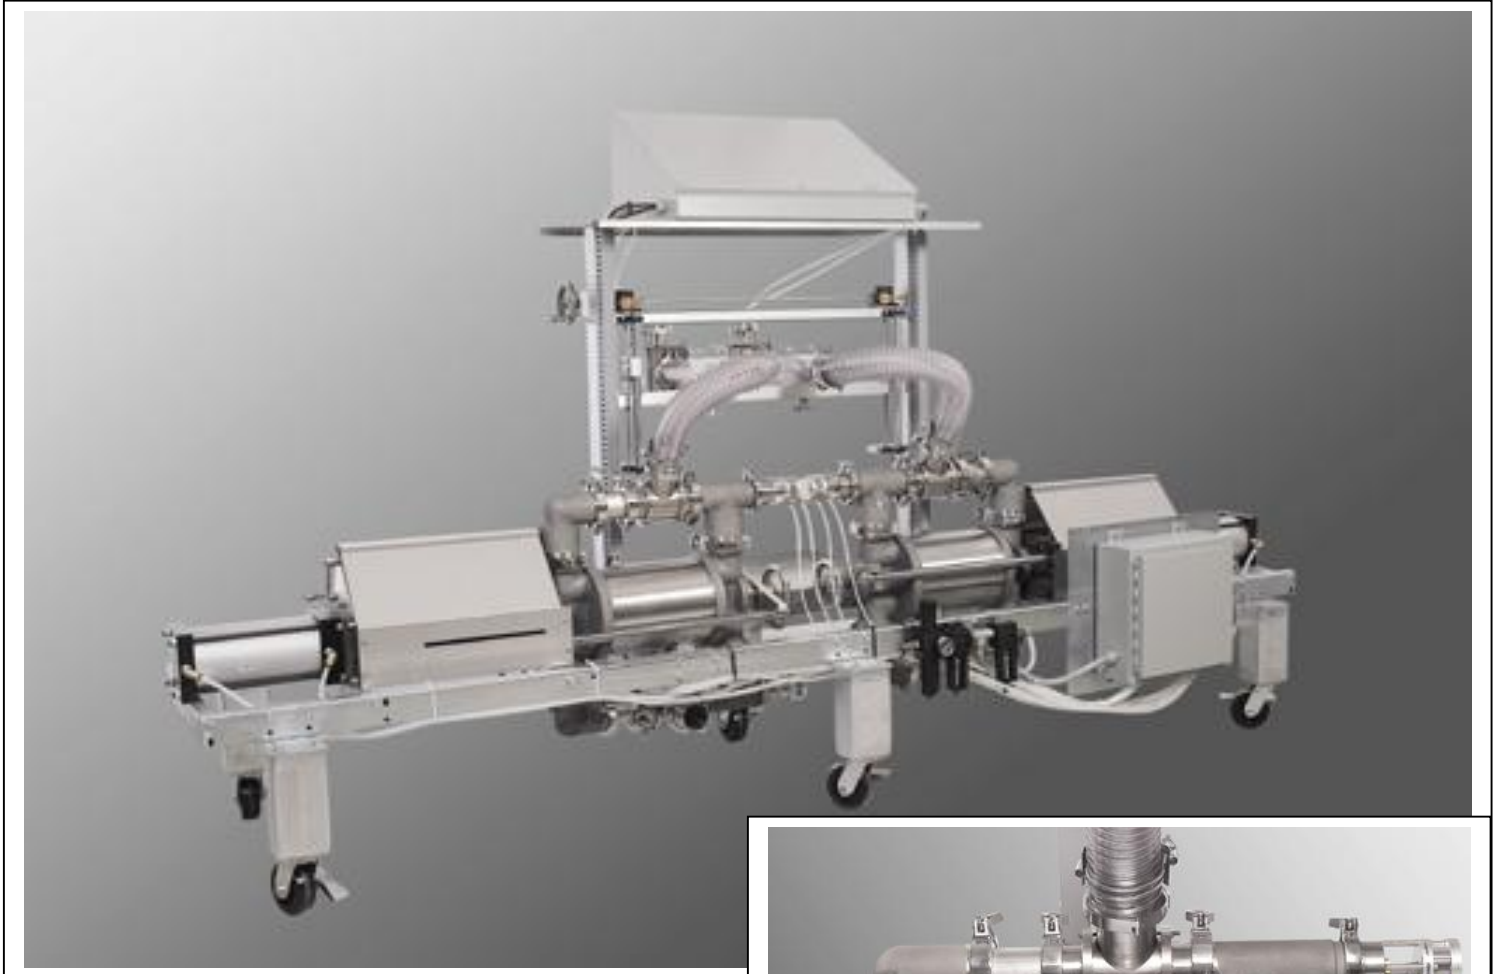

- Double acting five gallon pump
- Stainless steel and Teflon wetted parts
- Cast end caps, Tees and Elbows
- Quick release clamps for maintenance
- Powered check valves eliminate need for filter tub
- Both sides of the piston flooded with product for increased cylinder and seal life.
- Gravity check valve units also available